


REMOVAL


Special Tools: Click to display a list of tools used in this procedure

WARNING: On vehicles equipped with the high voltage system, disconnecting the 12-volt battery negative cable alone will not power down the 12-volt system. You must perform the 12-volt Power Down procedure before proceeding. Failure to follow these instructions may result in possible serious or fatal injury.

1. Disconnect the 12-volt negative battery cable.
2. Power down the high-voltage system ([Refer to 12 - Electric Powertrain System/Electric Vehicle Control System/Standard Procedure](#)).
3. Remove the radio buttons (1) using a Trim Stick [C-4755](#) or equivalent.

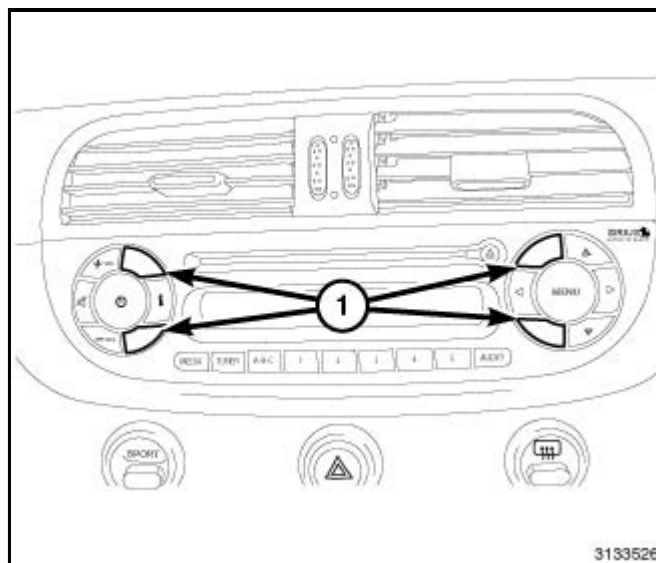

4. Insert radio tool [Remover, Radio 10322A](#) or equivalent.
5. Gently wiggle radio back and forth while pulling out.

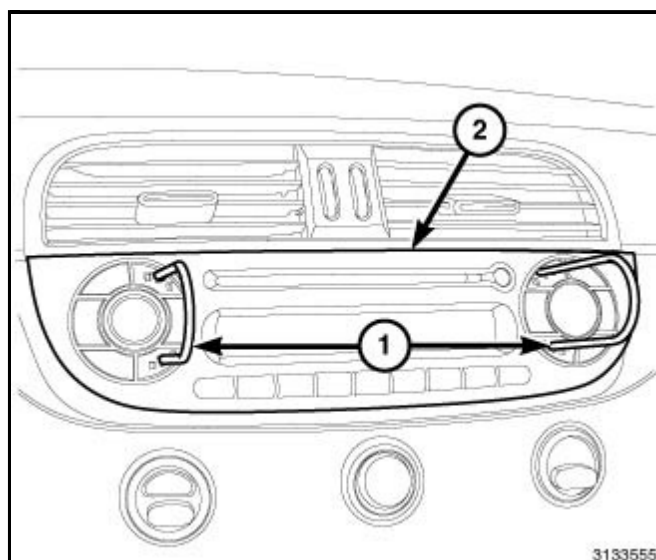

6. Disconnect the radio electrical connectors (1).

CAUTION: Pulling the antenna cable straight out of the radio without pulling on the locking antenna connector could damage the cable or radio.

7. Disconnect the antenna connector(s) (2) and remove from the vehicle.

